

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: Hiroshi ASAHINA

Title: ADDRESS RESOLUTION  
METHOD AND ADDRESS  
RESOLUTION COMMUNICATION  
SYSTEM

Appl. No.: Unassigned

Filing Date: 05/23/2000

Examiner: Unassigned

Art Unit: Unassigned

**UTILITY PATENT APPLICATION**  
**TRANSMITTAL**

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Hiroshi ASAHINA

Enclosed are:

- [ X ] Specification, Claim(s), and Abstract (21 pages).
- [ X ] Formal drawings (8 sheets, Figures 1-8).
- [ X ] Declaration and Power of Attorney (2 pages).
- [ X ] Assignment of the invention to NEC CORPORATION.
- [ X ] Assignment Recordation Cover Sheet.
- [ X ] Claim for Convention Priority w/1 certified document
- [ X ] Information Disclosure Statement.
- [ X ] Form PTO-1449 with copies of 8 listed reference(s).

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	15	- 20	= 0	x \$18.00	= \$0.00
Independents:	2	- 3	= 0	x \$78.00	= \$0.00
If any Multiple Dependent Claim(s) present:			+	\$260.00	= \$0.00
				SUBTOTAL:	= \$690.00
[ ]				Small Entity Fees Apply (subtract ½ of above):	= \$0.00
				Assignment Recordation fee:	= \$40.00
				TOTAL FILING FEE:	= \$730.00

- [ X ] A check in the amount of \$730.00 to cover the filing fee is enclosed.
- [ ] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [ X ] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 19-0741. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 19-0741.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date May 23, 2000

FOLEY & LARDNER  
Washington Harbour  
3000 K Street, N.W., Suite 500  
Washington, D.C. 20007-5109  
Telephone: (202) 672-5407  
Facsimile: (202) 672-5399

By Phillip J. Antida Reg. No. 38,819  
for David A. Blumenthal  
Attorney for Applicant  
Registration No. 26,257

ADDRESS RESOLUTION METHOD AND  
ADDRESS RESOLUTION COMMUNICATION SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an address resolution method and an address resolution communication system for a mobile packet terminal in a mobile communication system serving as a connection oriented type network, and more particularly to an address resolution method and an address resolution communication system for a mobile terminal which is changed at any time by handover of the mobile terminal when the mobile packet terminal and a connectionless type network are connected to each other.

2. Description of the Related Art

An address resolution protocol ARP is a protocol for dynamically associating an IP address and a physical address (MAC address in the case of Ethernet) in the Internet protocol IP. For example, when the physical address (00-22bit-24bit) of a target host is not known although the IP address (123,45,67,8) thereof is known, an IP packet containing a destination IP address as "address resolution request" is transmitted to all the terminals in order to know the physical address of the target host. When a terminal receiving the IP packet checks the IP address and knows that it is a request addressed to the terminal itself, the terminal returns its own physical address as "address resolution reply". Here, when the "address resolution request" is transmitted via a switch node

(SW), an address management table of the switch node (SW) stores an IP address and a physical address passed through each input/output port to store the terminal connected to the tip of each input/output port.

5           The "address resolution reply" returned from the destination terminal arrives at the transmission origin terminal to allow the transmission source terminal to refer to the physical address of the destination terminal. Therefore, the transmission source terminal can create a frame in which the physical address of the communication partner host is set, and transmit the IP packet to the connectionless type network.

10           Here, an "address resolution request" packet in which the destination IP address and the transmission source address are set to the same address is referred to as "Gratuitous-ARP" of the present invention as described later. A terminal transmitting this ARP packet does not expect any reply. A terminal which receives the Gratuitous-ARP packet discards it if the IP address thereof is not the IP address of the terminal itself. On the other hand, if the IP address is the IP address  
15           of the terminal itself, the terminal returns a reply. Therefore, both the transmission terminal/reception terminal can detect the duplication of the IP address.

20           The above operation is associated with the address resolution system. However, for the communication system based on the mobile packet terminal in which the terminal moves, a  
25           mechanism of performing address resolution has been proposed as the 2002<sup>nd</sup> of the RFC (Request For Comment) document (see

RFC2002). The detailed description on the Mechanism of Mobile IP is omitted because it is based on the "RFC2002" document.

As described above, when the packet terminal is fixed, in the network containing the switch node, the association between the respective input/output ports of the terminal and the switch node is not changed. However, when a terminal having a radio line is used as a physical layer protocol, there occurs so-called "handover" in which the mobile packet terminal moves to a different place. In this case, a node and an inter-working device (IWF) which terminate the radio line are physically changed.

As the radio line has been known an IS-95 system which is standardized in EIA (Electronic Industries Association), TIA (Telecommunication Industry Association), ANSI (American National Standard Institute) and CDG (CDMA Development Group) serving as institutes of standards of U.S.A. The IS-95 system is supplied as a public mobile communication system using techniques such as double code arrangement and soft handover, and a spread spectrum technique. The inter-working device (IWF: Inter-Working Function) is defined as a device having an interfacial function as a mutual connection unit for performing mutual connections between the connection oriented type communication system and the connectionless type communication system.

Fig. 1 shows the operation of the handover in a network having a switch node. As shown in Fig. 1, the radio-communication system comprises a mobile packet terminal (MS1: Mobile Station 1A), base station radio devices (BTS2: Base

transceiver stations 1A, 2B), base station controllers (BSC3: Base Station Controllers 3A, 3B), a mobile communication switching station (MSC4: Mobile Switching Center 4), a switch node 6, a packet network 7 connected to the outside and an inter-working device (IWF) 5 for connecting a radio interface and a packet network.

Figs. 7 and 8 show data transmission on the basis of a conventional address table.

A mobile station MS1A is connected to a base transceiver station (BTS2A) (not shown) through a radio line, and also connected through a base station controller (BSC3A) to an inter-working function locating in the range and a port 61 of the switch node 6. The switch node 6 has plural ports for the mobile stations such as a port 62 for the base station controller (BSC3B) (not shown), etc., a port 63 to be connected to the packet network serving as the connectionless type network, a switch port 65 as a transfer change-over switch and an address management table 64.

The address management table 64 has a corresponding table which associates the physical address of a mobile station (MS) 1A ( for example, a mobile device ID) with a port (for example, port 61) on the basis of an " address resolution request " transmitted from the mobile station (MS) 1A.

When the mobile station MS1A transmits an IP packet containing a destination address and a transmission source address, the IP packet is transmitted through BTS2A, BSC3A, the inter-working function (IWF) 5A and the port 61 to a switch portion 65.

The switch portion 65 refers to the address management table 64 on the basis of the destination address of the IP packet to determine the physical address of the packet network 7, and outputs the IP packet to a port 63 directing to the packet network 7. Conversely, when a call is made to the mobile station MS1A, the port 61 at which the physical address of the mobile station MS1A is registered is likewise determined on the basis of the address management table, and the IP packet is transmitted to the mobile station MS1A serving as a destination.

As described above, when an inter-working function (IWF) for connecting a radio line serving as a connection oriented type network and a connectionless type network is changed like the inter-working function (IWF) of the range in which the mobile station MS1A locates is handed over to a different inter-working function (IWF) 5B, the input/output ports of the switch node provided to the connectionless type network are changed. In this case, the port 61 registered in the address management table 64 is inconsistent with the physical address of the actual MS1A, and thus there occurs unconformity between the IP packet transmitted to each input/output port and the physical address management table provided to the switch node.

Therefore, it is impossible that the IP packet addressed to MS1A is transmitted to the inter-working device 1WF5A.

As described above, when the mobile station MS1A is handed over, it is necessary to promote the switch node to change the association of the logical-physical addresses. However, in the prior art, the functions must be installed in cooperation between the packet network and the mobile station

by using the Mobile IP serving as the mobile management protocol, and thus compatibility and processing capability of nodes are required.

5

#### SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to provide an address resolution method when a mobile packet terminal (mobile station:MS) in a connection oriented type network is handed over, together with an address resolution addressed from a connectionless type network to a mobile packet terminal (mobile station: MS).

In order to attain the above object, there is provided an address resolution method with which in an inter-working function (IWF) for connecting moving mobile packet terminals (MS) and a radio system containing these mobile packet terminals and a packet network having switch nodes, a destination address of an IP packet addressed from a switch node to a mobile packet terminal MS is set to be directed to a MS-locating inter-working function (IWF) at all times with neither an access to a terminal position registered data base (HLR: Home Location Register) nor a special-purpose mobile management protocol by transmitting a "Gratuitous-ARP" which is a kind of ARP request packet, thereby renewing the address table of the switch node.

20

25

Therefore, according to the present invention, there is provided a communication system comprising plural mobile packet terminals (mobile stations: MS), a connection oriented type network which accommodates the mobile packet terminals (MS) and



supplies a connection oriented type communication, a connectionless type network having a switch node (SW) and an inter-working function (IWF) for mutually connecting the respective networks, characterized in that when a mobile packet terminal (MS) is handed over, the inter-working function (IWF) receives from the mobile packet terminal (MS) data containing a "Gratuitous-ARP" packet which is one type of "address resolution protocol" (ARP) (see IETF: Internet Engineering Task Force Document RFC826), transmits the packet to the connectionless type network to make the switch node (SW) receive it, and the switch node (SW) renews a physical address management table provided in the switch node (SW) on the basis of the content of the packet to specify the inter-working function (IWF) at the handover destination of the mobile packet terminal (MS).

Further, according to the present invention, there is provided an address resolution communication system comprising plural moving mobile packet terminals (MS), a connection oriented type network which accommodates the plural mobile packet terminals (MS) and supplies a connection oriented type communication, a connectionless type network having a switch node (SW) and an inter-working function (IWF) for mutually connecting the respective networks to each other, characterized by comprising: the inter-working function (IWF) for receiving data containing a "Gratuitous-ARP" packet which is one type of "address resolution protocol" (ARP) (see IETF: Internet Engineering Task Force Document RFC826) from the mobile packet terminal (MS) when the mobile packet terminal (MS) is handed

over, and transmitting the "Gratuitous-ARP" packet to the connectionless type network to make the switch node (SW) receive the "Gratuitous-ARP"; and the switch node (SW) for renewing a physical address table provided in the switch node (SW) on the basis of the content of the "Gratuitous-ARP" packet to specify the inter-working function (IWF) at the handover destination of the mobile packet terminal (MS).

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a system to which an address resolution method of the present invention is applied;

Fig. 2 is a schematic diagram showing an inter-working function (IWF) of the address resolution method of the present invention;

Fig. 3 is a schematic diagram showing a switch node of the address resolution method of the present invention;

Fig. 4 is a diagram showing the structure of an address resolution protocol (ARP) packet of the address resolution method;

Fig. 5 is a route setting diagram based on an address table of the address resolution method according to the present invention;

Fig. 6 is a route setting diagram based on the address table of the address resolution method according to the present invention;

Fig. 7 is a route setting diagram based on the address table of the address resolution method according to the present invention; and

Fig. 8 is a route setting diagram based on a conventional address resolution method.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments according to the present invention will be described hereunder with reference to the accompanying drawings.

[First Embodiment]

(Description of Construction)

Fig. 1 shows the construction of a communication system to which the present invention is applied.

This communication system comprises a mobile packet terminal (mobile station: MS1), a base transceiver station (BTS2), a base station controller (BSC3), a mobile station center (MSC4), a switch node 6, a packet network 7 connected to the outside, and an inter-working function (IWF) 6 for connecting a radio interface and the packet network to each other. An international standard IS-95 interface is used as the radio interface of each unit. Ethernet is provided as a link layer of the switch node. The other communication system diagrams are the same as described with respect to the prior art.

Fig. 2 shows the construction of the inter-working function IWF 5. The inter-working function IWF 5 comprises a radio channel interface 51 connected to the base station controller BSC 3, a packet network interface 52, a resolution address table 53, a radio side packet controller 54 and a radio side packet detector 55.

Fig. 3 shows the construction of the switch node 6. The switch node 6 comprises the base transceiver station (BTS2A), the base station controller (BSC3A), the port 61 for the inter-working function IWF5A, the base transceiver station (BTS2B), the base station controller (BSC3B), the port 62 for the inter-working function IWF5B, the port 63 for the packet network 7, the address management table 64 and the switching portion 65 having a switching function.

#### (Description of Operation)

When the packet terminal MS1A of a mobile is connected to the switch node 6 in the packet network 7 through the inter-working function IWF5A, the packet terminal MS1A is handed over under the base station control BSC3B.

Subsequently, as shown in the flow of the data indicated by a heavy line of Fig. 5, the packet terminal MS1A transmits a "Gratuitous-ARP" of the address resolution protocol to the inter-working function IWF5B through the base transceiver station (BTS2B) and the base station controller (BSC3B), and notifies its own "mobile ID" and "IP address" to the inter-working function IWF5B.

The construction of the "Gratuitous-ARP" message is shown in Fig. 4. The message comprises a destination physical address 6, a transmission source physical address 6, a frame type 2 and a data portion 28. the number allocated to each of the above elements indicates the number of byte units, and for example, the frame type indicates 2 bytes. The data portion comprises a hardware type 2 for identifying a network, a request source protocol type 2 which is located at the upper

layer of a network access layer such as IP or the like and identifies the protocol, a hard size 1 having a hardware address length for indicating the length of MAC (Media Access Control) address, a protocol size 1 having a protocol address length for indicating the length of an IP address, an operation 2 for identifying whether the message is an ARP request message or ARP reply message, a transmission physical address 6 for indicating a transmission source hardware address of a packet, a transmission IP address 4 of the transmission source of a packet, a physical address 6 which is unused in this message, and a transmission IP address 4 of the transmission source of the packet, totally 28 bytes.

When receiving a link layer frame in the radio channel interface 51, the inter-working function IWF5B extracts the IP packet in the radio side packet detector 55, and judges whether the "frame type" shown in Fig. 4 is "0806" and the "operation" field is equal to 1. If the judgment is YES, the packet concerned is judged as the "Gratuitous-ARP" message, and stored in the resolution address table 53.

Subsequently, when the "Gratuitous-ARP" message is stored in the resolution address table 53, the radio side packet controller 56 of the inter-working function IWF5B sets the "transmission source physical address" as the "target physical address" in the ARP message shown in Fig. 4 to the physical address of the inter-working function IWF5B, and sets the "transmission IP address" and the "target IP address" to the IP address of the packet terminal MS1A. At the same time, it stores the IP address and the physical address of MS1A.

The message thus set is converted to an Ethernet frame in which the destination is set to the switch node and the transmission source is set to the inter-working function (IWF)5B, and then it is transmitted as "Gratuitous-ARP" to the packet network interface 52.

As shown in the flow of data indicated by a heavy line of Fig. 6, when receiving the frame as "Gratuitous-ARP", the switch node 6 registers the "physical address of the inter-working function IWF5B" as the physical address of the entry of the packet terminal MS1A of the address management table 64, renews the address management table 64 and associates it with the port 62. Subsequently, the switch node 6 directs to the port 62 a packet address to the packet terminal MS1A. With respect to the connection of the port 63, the state is the same as before the handover and thus the port 62 and the port 63 are connected to each other, and thus the data communication is continued.

The destination of the "Gratuitous-ARP" packet transmitted from the inter-working function IWF5B is set to the switch node, so that the packet does not reach another inter-working function IWF5A.

In the above embodiment, the packet data communication between the packet terminal MS of the mobile and the fixed packet network terminal is described. However, the present invention is applicable to the packet transmission between packet terminals MS of mobiles, and the mutual communication between mobiles can be performed by referring to the address management table in the switch node.

## [Second Embodiment]

The construction and operation of the second embodiment are different from those of the first embodiment in that the physical address in the ARP packet from the mobile packet terminal MS is the "telephone number" given to MS. The description with respect to Fig. 1 and Figs. 2 to 6 is the same as the first embodiment.

In this case, the packet terminal MS1A first sets "the telephone number given to MS" as an ARP request packet (Gratuitous-ARP) shown in Fig. 4, as the transmission physical address after the handover is detected.

In the resolution address table of the inter-working function (IWF) are stored the "IP address" and the "telephone number" of MS1A.

The "Gratuitous-ARP" to the switch node is the same as the first embodiment.

A mobile packet terminal of the above embodiment is applied to a mobile terminal used for a CDMA system in the mobile terminal of the above IS-95 system, and the handover is identified from the mobile terminal, and the "Gratuitous-ARP" indicating ID of its own mobile terminal and destination IWF are transmitted to a base station, whereby it operates as a connection oriented type system as the radio side and the routing based on the connectionless type system at a wiring side based IMF as a mutual connecting device is established, thereby allowing the data radio transmission. Further, the present invention is not limited to the IS-95 system, and may be applied to even a mobile packet terminal used in the system

of IMT-2000 (International Mobile Telecommunication-2000) which is called as a next-generation mobile communication.

According to the present invention, when the packet terminal (MS) of a mobile is handed over, the address resolution packet is transmitted from the packet terminal MS to renew the address management table of the switch node of the connectionless type network, so that no special mechanism for movement management is required and the physical address of an inter-working function (IWF) in which MS is located at all times is set at the resolution address addressed from the connectionless type network to the mobile packet terminal MS.

Therefore, the packet is prevented from being routed to the inter-working function (IWF) before the handover, and thus the communication loss can be avoided.

Further, it is sufficient to install the processing function of the address resolution packet in the packet terminal MS of the mobile and the inter-working function (IWF), so that an existing device can be used as the switch node.

Still further, a conventional protocol is used, and thus no special processing should be considered for the controllers of the switch node and the inter-working function (IWF).

Although the present invention has been shown and described with respect to best mode embodiments thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions, and additions in the form and detail thereof may be made therein without departing from the spirit and scope of the present invention.



WHAT IS CLAIMED IS

1. An address resolution method for a communication system comprising a plurality of mobile packet terminals (mobile stations: MS), a connection oriented type network which accommodates the mobile packet terminals (MS) and supplies a connection oriented type communication, a connectionless type network having a switch node (SW) and an inter-working function (IWF) for mutually connecting the respective networks, comprising the steps of:

receiving data containing a "Gratuitous-ARP" packet which is one type of "address resolution protocol" (ARP) (see IETF:Internet Engineering Task Force Document RFC826), from the mobile packet terminal (MS) on the inter-working function (IWF), in that when a mobile packet terminal (MS) is handed over;

transmitting the packet to the connectionless type network on the inter-working function (IWF);

making the switch node (SW) receive it on the inter-working function (IWF);

renews a physical address management table provided in the switch node (SW) on the basis of the content of the packet on the switch node (SW); and

determining the inter-working function (IWF) at the handover destination of the mobile packet terminal (MS) on the switch node (SW).

2. The address resolution method as claimed in claim 1,

wherein when the handover over the inter-working function (IWF) is detected, the mobile packet terminal (MS) creates and transmits the IP address of its own mobile packet terminal (MS)

to a transmission IP (Internet Protocol) address portion of the  
"non-group ARP" and a target IP address portion, and creates  
and transmits to a transmission physical address portion an ARP  
request message in which a mobile ID of its own mobile packet  
terminal (MS) is set.

3. The address resolution method as claimed in claim 1,  
wherein when the handover over the inter-working function  
(IWF) is detected, the mobile packet terminal (MS) creates and  
transmits the IP address of its own mobile packet terminal (MS)  
to a transmission IP (Internet Protocol) address portion of the  
"non-group ARP" and a target IP address portion, and creates  
and transmits to a transmission physical address portion an ARP  
request message in which the telephone number of its own mobile  
packet terminal (MS) is set.

4. The address resolution method as claimed in claim 1,  
wherein the inter-working function (IWF) uses Ethernet as  
the connectionless type network, and when receiving data  
containing the ARP request message from the mobile packet  
terminal, the inter-working function (IWF) converts the data to  
an Ethernet frame which is the optimum format to the Ethernet  
as a physical layer of the connectionless type network and  
transmitting the frame to the connectionless type network.

5. The address resolution method as claimed in claim 1,  
wherein the inter-working function (IWF) uses as the connection  
oriented type communication system an IS-95 system which is  
standardized in EIA (Electronic Industries Association)/TIA  
(Telecommunication Industry Association), ANSI (American

National Standard Institute) and CDG (CDMA Development Group) serving as institutes of standards of U.S.A.

6. The address resolution method as claimed in claim 2,

wherein when the handover over the inter-working function (IWF) is detected, the mobile packet terminal (MS) creates and transmits the IP address of its own mobile packet terminal (MS) to a transmission IP (Internet Protocol) address portion of the "non-group ARP" and a target IP address portion, and creates and transmits to a transmission physical address portion an ARP request message in which the telephone number of its own mobile packet terminal (MS) is set.

7. The address resolution method as claimed in claim 2,

wherein the inter-working function (IWF) uses Ethernet as the connectionless type network, and when receiving data containing the ARP request message from the mobile packet terminal, the inter-working function (IWF) converts the data to an Ethernet frame which is the optimum format to the Ethernet as a physical layer of the connectionless type network and transmitting the frame to the connectionless type network.

8. The address resolution method as claimed in claim 2,

wherein the inter-working function (IWF) uses as the connection oriented type communication system an IS-95 system which is standardized in EIA (Electronic Industries Association)/TIA (Telecommunication Industry Association), ANSI (American National Standard Institute) and CDG (CDMA Development Group) serving as institutes of standards of U.S.A.

9. The address resolution method as claimed in claim 3,

wherein the inter-working function (IWF) uses as the connection oriented type communication system an IS-95 system which is standardized in EIA (Electronic Industries Association)/TIA (Telecommunication Industry Association), ANSI (American National Standard Institute) and CDG (CDMA Development Group) serving as institutes of standards of U.S.A.

10. An address resolution communication system comprising a plurality of moving mobile packet terminals (MS), a connection oriented type network which accommodates the plural mobile packet terminals (MS) and supplies a connection oriented type communication, a connectionless type network having a switch node (SW) and an inter-working function (IWF) for mutually connecting the respective networks to each other, the address resolution communication system comprising:

the inter-working function (IWF) for receiving data containing a "Gratuitous-ARP" packet which is one type of "address resolution protocol" (ARP) (see IETF:Internet Engineering Task Force Document RFC826) from the mobile packet terminal (MS) when the mobile packet terminal (MS) is handed over, and transmitting the "Gratuitous-ARP" packet to the connectionless type network to make the switch node (SW) receive the "Gratuitous-ARP"; and

the switch node (SW) for renewing a physical address table provided in the switch node (SW) on the basis of the content of the "Gratuitous-ARP" packet to specify the inter-working function (IWF) at the handover destination of the mobile packet terminal (MS).

11. The address resolution communication system as claimed in claim 10,

wherein when detecting the handover over the inter-working function (IWF), said mobile packet terminal (MS) creates and transmits the IP address of its own mobile packet terminal (MS) to a transmission IP (Internet Protocol) address portion and a target IP address portion, and creates and transmits to a transmission physical address portion an ARP request message in which the mobile ID of its own packet terminal (MS) is set.

12. The address resolution communication system as claimed in claim 10,

wherein when the handover over the inter-working function (IWF) is detected, the mobile packet terminal (MS) creates and transmits the IP address of its own mobile packet terminal (MS) to a transmission IP (Internet Protocol) address portion of the "non-group ARP" and a target IP address portion, and creates and transmits to a transmission physical address portion an ARP request message in which a mobile ID of its own mobile packet terminal (MS) is set.

13. The address resolution communication system as claimed in claim 10,

wherein when the handover over the inter-working function (IWF) is detected, the mobile packet terminal (MS) creates and transmits the IP address of its own mobile packet terminal (MS) to a transmission IP (Internet Protocol) address portion of the "non-group ARP" and a target IP address portion, and creates and transmits to a transmission physical address portion an ARP

request message in which the telephone number of its own mobile packet terminal (MS) is set.

14. The address resolution method as claimed in claim 10,

wherein the inter-working function (IWF) uses Ethernet as the connectionless type network, and when receiving data containing the ARP request message from the mobile packet terminal, the inter-working function (IWF) converts the data to an Ethernet frame which is the optimum format to the Ethernet as a physical layer of the connectionless type network and transmitting the frame to the connectionless type network.

15. The address resolution communication system as claimed in claim 10,

wherein the inter-working function (IWF) uses as the connection oriented type communication system an IS-95 system which is standardized in EIA (Electronic Industries Association)/TIA (Telecommunication Industry Association), ANSI (American National Standard Institute) and CDG (CDMA Development Group) serving as institutes of standards of U.S.A.

In an address resolution method for an inter-working function (IWF) for mutually connecting mobile packet terminals (MS) and a radio system accommodating the packet terminals (MS) and a packet network having a switch node, when the packet terminal (MS) is handed over, the packet terminal (MS) transmits a kind of "address resolution protocol (ARP): see Internet Engineering Task Force Document RFC826", the inter-working function (IWF) transmits the ARP packet to the packet network and the switch node renews an address management table on the basis of the packet received.

FIG. 1

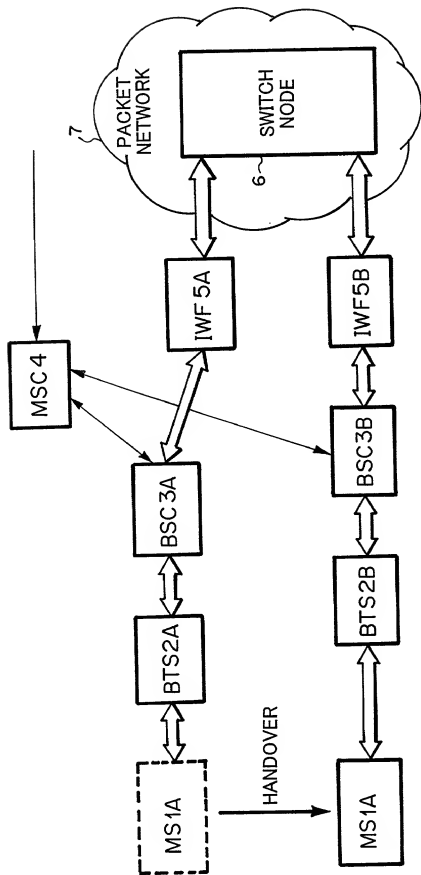




FIG. 2

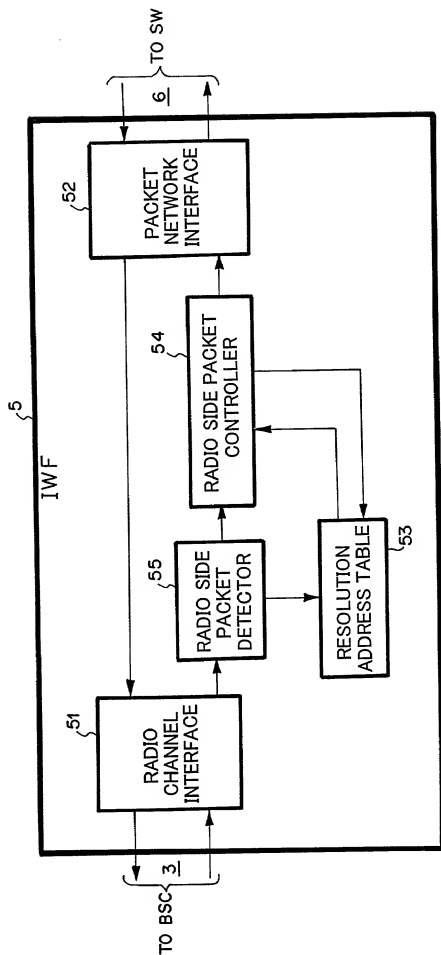


FIG. 3

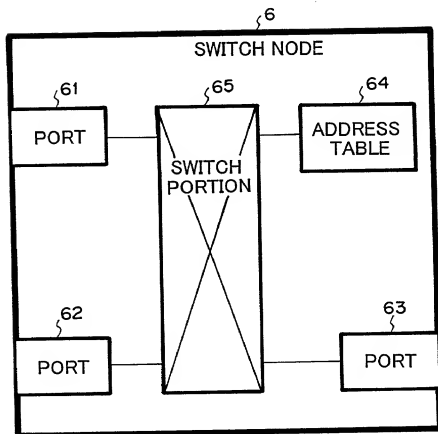




FIG. 5



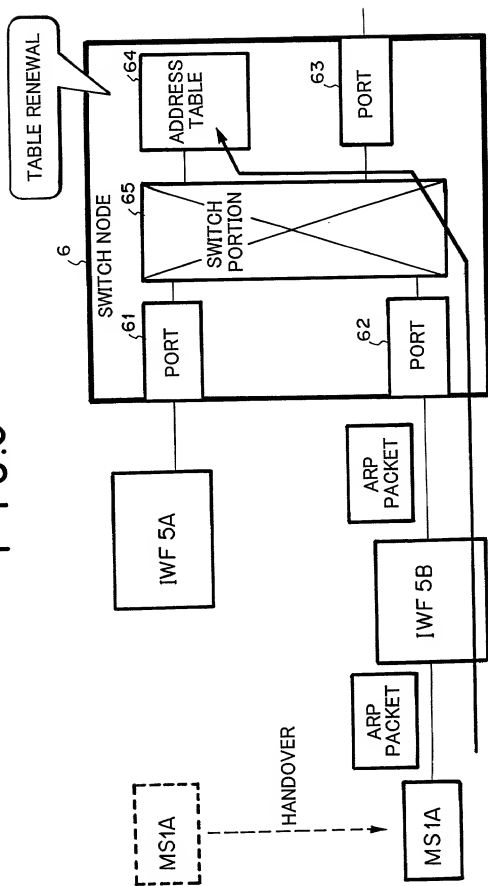


FIG. 6



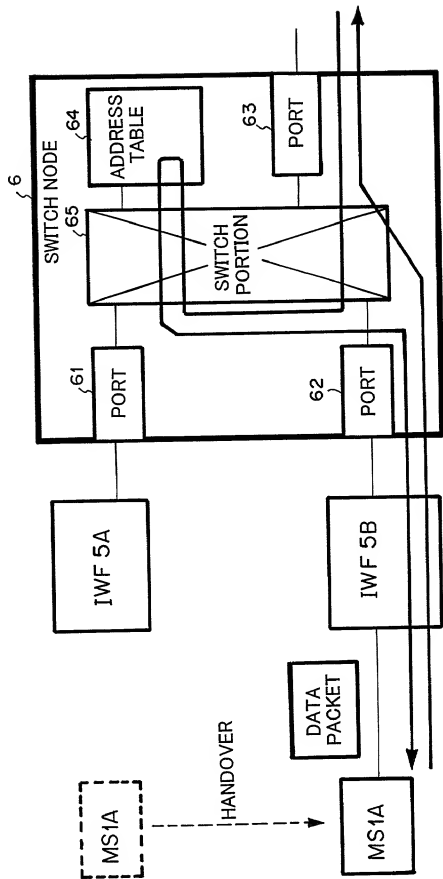

**F I G . 8**  
**P R I O R   A R T**

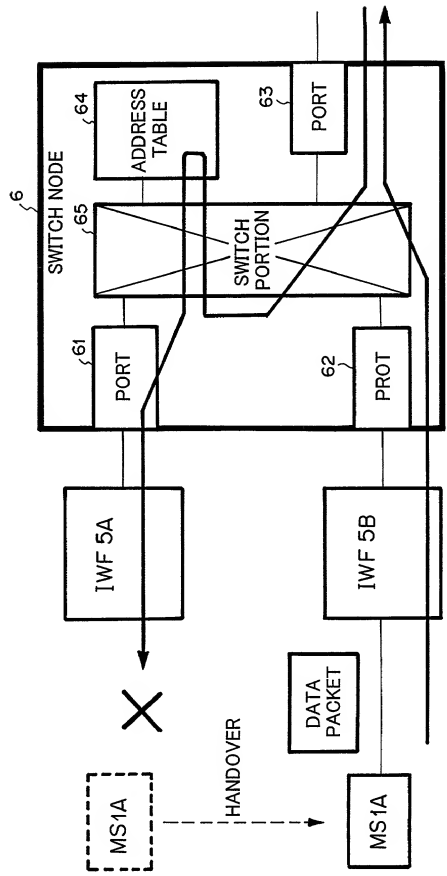

# DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ADDRESS RESOLUTION METHOD AND ADDRESS RESOLUTION COMMUNICATION SYSTEM

the specification of which is attached hereto unless the following box is checked:

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

## PRIOR FOREIGN APPLICATION(S)

NUMBER	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED
45314/1999	Japan	25/05/1999	YES

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

APPLICATION NO.	FILING DATE

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:


APPLICATION SERIAL NO.	FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

I hereby appoint as my attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Stephen A. Bent, Reg. No. 29,768; David A. Blumenthal, Reg. No. 26,257; William T. Ellis, Reg. No. 26,874; John J. Feldhaus, Reg. No. 28,822; Patricia D. Grandos, Reg. No. 33,683; John F. Isaacson, Reg. No. 33,715; Donald D. Jeffery, Reg. No. 19,980; Eugene M. Lee, Reg. No. 32,039; Peter G. Mack, Reg. No. 26,001; Brian J. McNamara, Reg. No. 32,789; Sybil Meloy, Reg. No. 22,749; George E. Quillin, Reg. No. 32,792; Colin G. Sandercock, Reg. No. 31,298; Bernhard D. Saxe, Reg. No. 28,665; Charles F. Schill, Reg. No. 27,590; Richard L. Schwaab, Reg. No. 25,479; Arthur Schwartz, Reg. No. 22,115; Harold C. Wegner, Reg. No. 25,258.



Address all correspondence to FOLEY & LARDNER, Washington Harbour, 3000 K Street, N.W., Suite 500, P.O. Box 25696, Washington, D.C. 20007-8696. Address telephone communications to \_\_\_\_\_ at (202) 672-5300.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor Hiroshi ASAHINA	Signature of First or Sole Inventor <i>Hiroshi Asahina</i> 	Date May 11, 2000
Residence Address Tokyo, Japan	Country of Citizenship Japan	
Post Office Address c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan		

Full Name of Second Inventor	Signature of Second Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Third Inventor	Signature of Third Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Fourth Inventor	Signature of Fourth Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Fifth Inventor	Signature of Fifth Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		